



25W Ext. Low Ku-Band BUC

KEY FEATURES


- ◆ Output frequency 12.75-13.50 GHz
- ◆ Double L.O. (electronically and manually switchable (11.80 and 12.05 GHz)
- ◆ Based on GaN technology which enables high efficiency, low power consumption and high reliability
- ◆ Incomparable low power consumption (120W max.)
- ◆ Auto-ranging powering option 15 - 60 VDC
- ◆ Smallest and lightest
- ◆ Digital temperature compensation
- ◆ Field-exchangeable (F/N) IF connector
- ◆ Optional M&C - combined RS-232/485 / Ethernet (HTTP and SNMP ver. 2 & 3) / FSK (optional)
- ◆ Amplifier, L.O. and 10MHz Reference Status LEDs
- ◆ Internal 10MHz high stability reference (optional)
- ◆ RoHS compliant

ABE25SKXL/ ABE25SKXLF



This smallest and lightest fanless 25W L-To Low Ku-Band Block Up Converter is designed to be mounted on a feed horn. The unit is ideal for portable and mobile applications. Double L.O. feature makes unit universal for Low Ku-Band requirements. It is powered either with 24/48 VDC and consumes less than 120W.

Mechanical Drawing

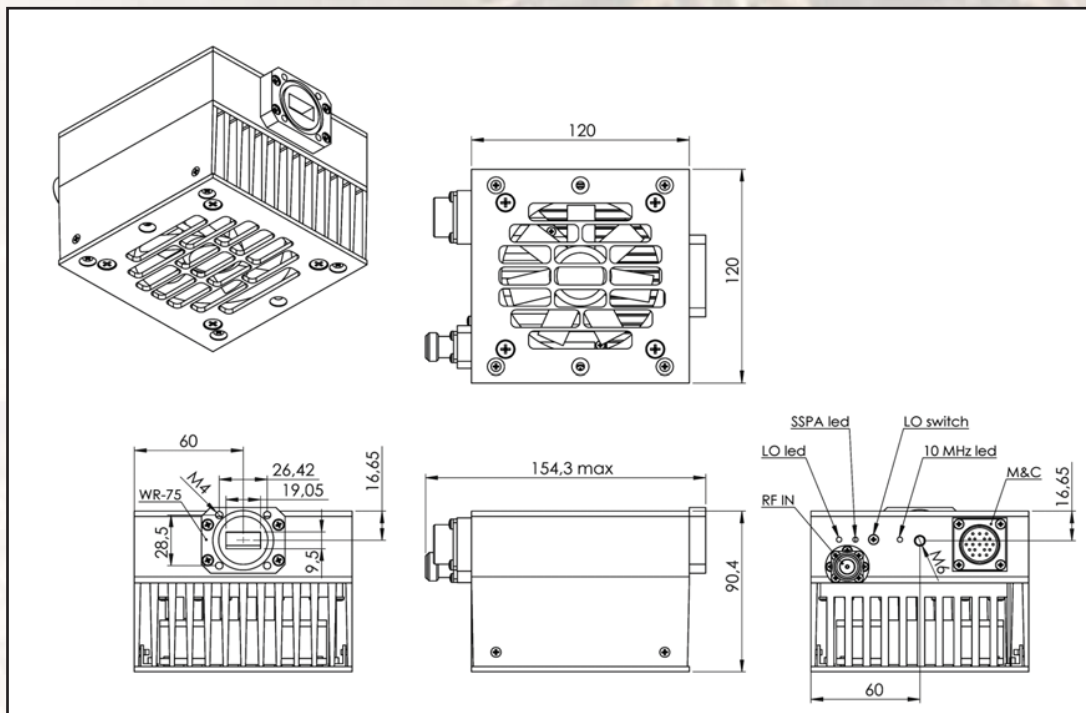



25W Ext. Low Ku-Band BUC

TECHNICAL SPECIFICATIONS		
RF frequency		12.75 to 13.50 GHz
Dual local oscillator		11.80 GHz and 12.05 GHz
IF frequency		950 to 1,700 MHz
Output power		25W (43.5 dBm min, 44 dBm typ.) 13W P-Linear (41 dBm min.)
IF connector		N-type or F-type (field-exchangeable)
Power supply auto-ranging		+15 ~ +60 VDC via IF cable, 120W max.
Output interface		WR-75 G
Gain		65 dB min., 68 dB nominal
IMD3 (two tones)		-26 dBc max. 2 signal 5 MHz apart at P-LINEAR
L.O. leakage		-45 dBm max.
Spurious		-53 dBc max.
Spectral regrowth (QPSK at 1.5x and OQPSK at 1.0x symbol rate offset with 2dB back-off from rated output power)		-30 dBc
Requirement for external reference:	frequency input power	via IF cable 10 MHz (sine-wave) -5 to +5 dBm @ input port
TX Gain variation		± 0.5 dB over 40 MHz ± 1.8 dB over full band
TX Gain stability over temperature range		± 1.5 dB typ., ± 1.8 dB max.
Phase noise (Exceeds Intelsat's standard IESS308/309)		-55 dBc/Hz max. @ 10 Hz -65 dBc/Hz max. @ 100 Hz -75 dBc/Hz max. @ 1 KHz -85 dBc/Hz max. @ 10 KHz -95 dBc/Hz max. @ 100 KHz -115 dBc/Hz max. @ 1 MHz
Noise power density	Transmit Receive	-66 dBm/Hz (max.) -157 dBm/Hz (max.)
Noise figure		20 dB max.
Input V.S.W.R.		1.5 : 1 max.
Output V.S.W.R.		1.5 : 1 max.
M&C (optional)		RS-232/485 / Ethernet / FSK (optional)
Mute		Shut off the BUC in case of L.O. unlocked
Status LED Amplifier L.O. 10MHz	RED GREEN GREEN GREEN blinking GREEN GREEN blinking RED	Summary alarm All OK All OK standard L.O. 12.05 GHz All OK extended L.O. 11.80 GHz External 10MHz reference Internal 10MHz reference No 10MHz reference detected
Temperature range (ambient) operating storage		-40 deg C to +55 deg C -55 deg C to +85 deg C
Vibration and shock		Complies with MIL-STD-810E
IP rating		IP67
Dimensions & housing		120 (L) x 120 (W) x 90.4 (H) mm 4.72" (L) x 4.72" (W) x 3.55" (H)
Weight		1.8 kg (3.96 lbs) max.